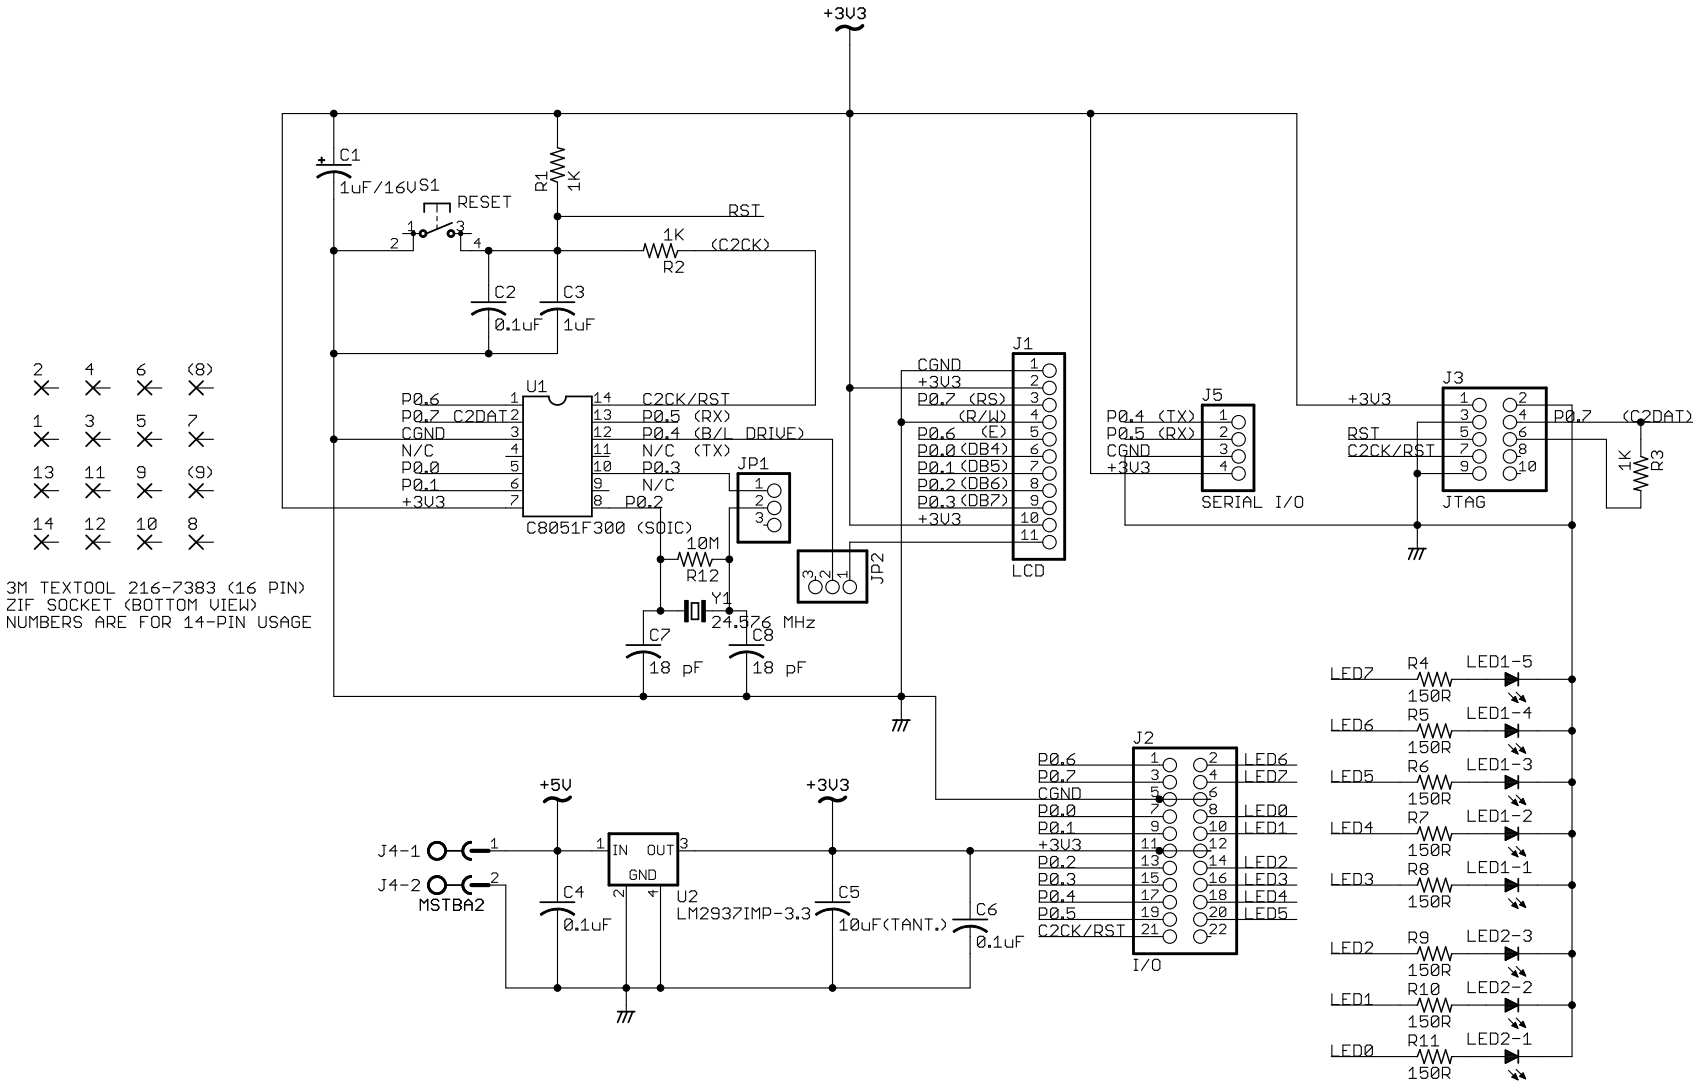

NOTES:

1. USE BERG JUMPERS AT J2 TO CONNECT LEDs TO PORT OUTPUTS.
2. XTAL IS DK 300-8568-1-ND (MFG HCM49-24.576 MABJ-UT)
3. USE JP1 TO SELECT XTAL OR GP I/O.
4. USE JP2 TO SELECT BACKLIGHT DRIVE OR GP I/O.

ISSUE	**Bob Nash** CONSULTING USA	THIS DRAWING CONTAINS PROPRIETARY INFORMATION AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.	© 2007
DRAWN RJN	TITLE 300/600 DEV BOARD		REV B
CHECKED RMM	DATE 1/11/2010 11:22:55 AM		DRG Nº
DATE 27DEC09	FILE: 300&600-DEV_B		PAGE: 1/1